




# KOYO MANUFACTURING (THAILAND)CO.,LTD.

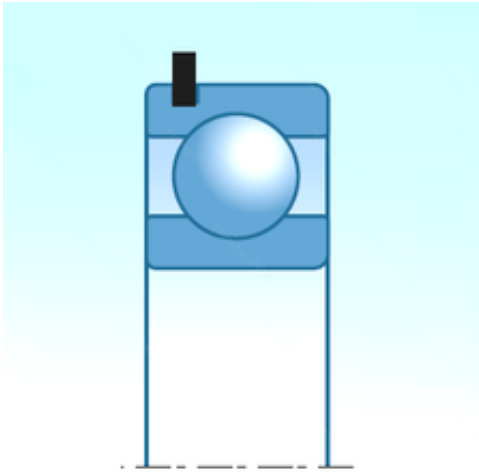

6305ZZNR Bearing 2D drawings and 3D CAD models

25,000 mm x 62,000 mm x 17,000 mm NTN  
6305ZZNR deep groove ball bearings

Bearing No. 6305ZZNR

Size	25x62x17 mm
Bore Diameter	25,000 mm
Outer Diameter	62,000 mm
Width	17,000 mm
d	25,000 mm
D	62,000 mm
B	17,000 mm
C	17,000 mm
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359011272
Product Group	B00308
Enclosure	2 Metal Shields
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	Yes
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	25MM Bore; 62MM



# KOYO MANUFACTURING (THAILAND)CO.,LTD.

	Outside Diameter; 17MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Ste
Other Features	Deep Groove   With Snap Ring   Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Weight / LBS	0.52
Outside Diameter	2.441 Inch   62 Millimeter
Inner Race Width	0 Inch   0 Millimeter
Bore	0.984 Inch   25 Millimeter
Outer Race Width	0.669 Inch   17 Millimeter
bore diameter:	25 mm
static load capacity:	10900 N
outside diameter:	62 mm
precision rating:	ISO Class 0
overall width:	17 mm
finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Shielded
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	17 mm



## KOYO MANUFACTURING (THAILAND)CO.,LTD.

snap ring included:	With Snap Ring
outer ring width:	17 mm
internal clearance:	CN
maximum rpm (grease):	12000 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	1.1 mm
dynamic load capacity:	21200 N
manufacturer product page:	<a href="#">Click here</a>